


図面／規格  
【10. 9 六角ボルト】

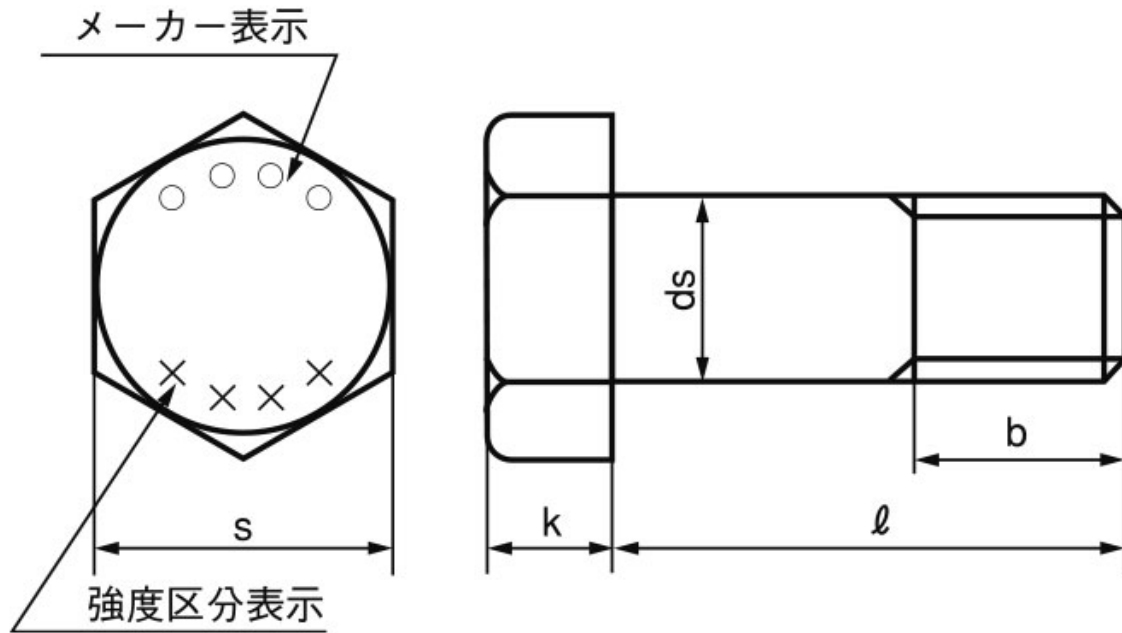

呼び径 (d)	ds		K		S	
	基準寸法	許容差	基準寸法	許容差	基準寸法	許容差
M5	5	0 -0.1	3.5	±0.15	8	0 -0.2
M6	6	0	4	±0.25	10	0 -0.6
M8	8	-0.2	5.5		13	0
M10	10	0	7	±0.3	17	-0.7
M12	12		8		19	0 -0.8
M14	14		9		22	
M16	16	10	24			
M18	18	-0.25	12	±0.35	27	-1.0
M20	20	0	13		30	
M22	22		14		32	
M24	24		15	36		
M27	27	-0.35	17	±0.4	41	-1.2
M30	30	0	19		46	
M33	33		21		50	
M36	36		23	55		
M39	39	-0.4	25	±0.4	60	0
M42	42		26		65	
M45	45		28		70	
M48	48	0	30	±0.5	75	-1.4
M52	52		33		80	
M56	56		35		85	
M64	64	-0.45	40		95	

(b は d X2+6、長さ 130 より d X2+12、長さ 220 より d X2+25)