


図面／規格  
【ルーティカット（CA・CAS）】

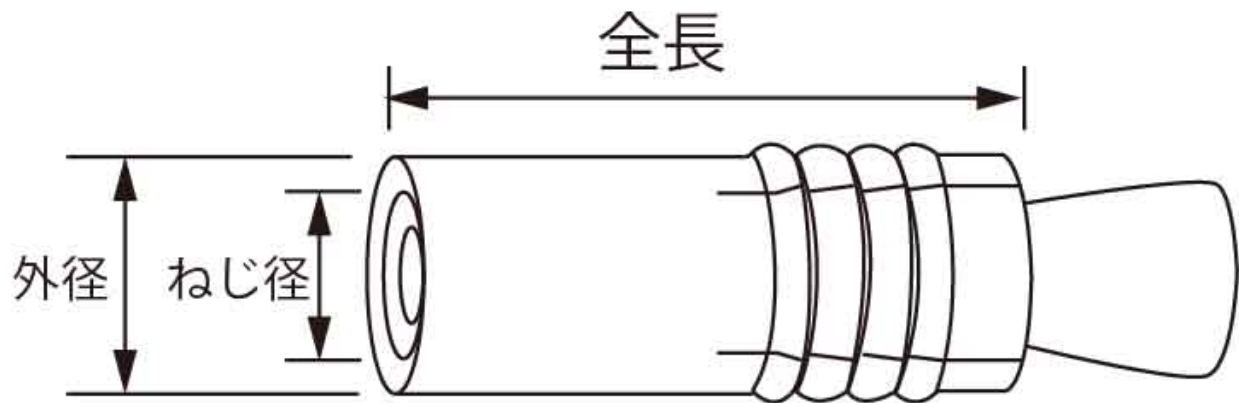

CAタイプ

品番	ねじ径	外径 (mm)	全長 (mm)	ねじ長 (mm)	穿孔条件(mm)		埋込み深さ (mm)
					下穴径	下穴深さ	
6CA	M6	10.50	30	10	11.0	33	30
8CA	M8	12.00	35	14	12.5	39	35
10CA	M10	14.00	40	14	14.5	45	40
12CA	M12	17.50	50	22	18.0	56	50
16CA	M16	21.50	60	24	22.0	68	60
20CA	M20	25.50	80	30	26.0	90	80
22CA	M22	28.50	90	35	29.0	100	90
28CA	W1/4	10.50	30	10	11.0	33	30
258CA	W5/16	12.00	35	14	12.5	39	35
38CA-12R (30L)		12.00	30	10	12.5	35	30
38CA-12R	W3/8	12.00	35	10	12.5	40	35
38CA		14.00	40	14	14.5	45	40
48CA	W1/2	17.50	50	22	18.0	56	50
58CA	W5/8	21.50	60	24	22.0	68	60
68CA	W3/4	25.50	80	30	26.0	90	80
78CA	W7/8	28.50	90	35	29.0	100	90

CASタイプ

品番	ねじ径	外径 (mm)	全長 (mm)	ねじ長 (mm)	穿孔条件(mm)		埋込み深さ (mm)
					下穴径	下穴深さ	
6CAS	M6	10.50	30	10	11.0	33	30
8CAS	M8	12.00	35	14	12.5	39	35
10CAS	M10	14.00	40	14	14.5	45	40
12CAS	M12	17.50	50	22	18.0	56	50
16CAS	M16	21.50	60	24	22.0	68	60
20CAS	M20	25.50	80	30	26.0	90	80
22CAS	M22	28.50	90	35	29.0	100	90
28CAS	W1/4	10.50	30	10	11.0	33	30
258CAS	W5/16	12.00	35	14	12.5	39	35
38CAS	W3/8	14.00	40	14	14.5	45	40
48CAS	W1/2	17.50	50	22	18.0	56	50
58CAS	W5/8	21.50	60	24	22.0	68	60
68CAS	W3/4	25.50	80	30	26.0	90	80
78CAS	W7/8	28.50	90	35	29.0	100	90