


図面／規格
【シーティールアンカー（CT）】

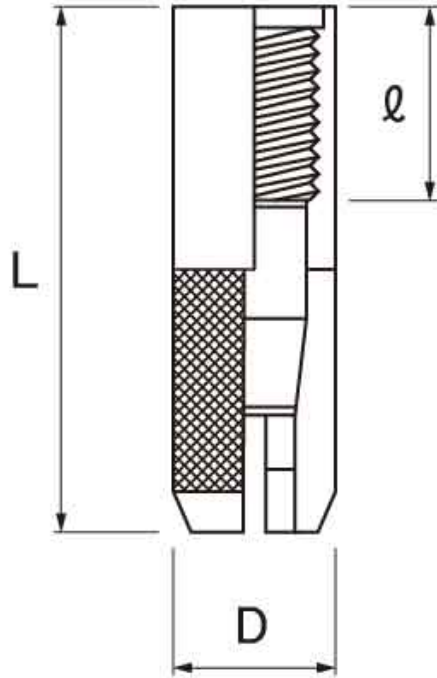

[単位: mm]

	品番	ねじの呼び	アンカー外径 D	全長 L	ねじ部長さ l	穿孔径	穿孔深さ	アンカー 埋込み長さ
スチール製 三価クロメート処理	CT-625	M6	8.0	25	10	8.5	25	25
	CT-830	M8	10.0	30	12	10.5	30	30
	CT-1040	M10	12.5	40	16	13.0	40	40
	CT-1070	M10	12.5	70	25	13.0	70	70
	CT-1250	M12	16.0	50	20	16.5	50	50
	CT-1280	M12	16.0	80	25	16.5	80	80
	CT-1660	M16	20.0	60	23	20.5	60	60
	CT-2530	W5/16	10.0	30	12	10.5	30	30
	CT-3040	W3/8	12.0	40	16	12.5	40	40
	CT-3070	W3/8	12.5	70	25	13.0	70	70
	CT-4050	W1/2	16.0	50	20	16.5	50	50
	CT-4080	W1/2	16.0	80	25	16.5	80	80
CT-5060	W5/8	20.0	60	23	20.5	60	60	
ステンレス製 SUS304系	SCT-625	M6	8.0	25	10	8.5	25	25
	SCT-830	M8	10.0	30	12	10.5	30	30
	SCT-1040	M10	12.5	40	16	13.0	40	40
	SCT-1250	M12	16.0	50	20	16.5	50	50
	SCT-1660	M16	20.0	60	23	20.5	60	60
	SCT-2530	W5/16	10.0	30	12	10.5	30	30
	SCT-3040	W3/8	12.0	40	16	12.5	40	40
	SCT-4050	W1/2	16.0	50	20	16.5	50	50
SCT-5060	W5/8	20.0	60	23	20.5	60	60	