


図面／規格  
【HPアンカー（HP）】

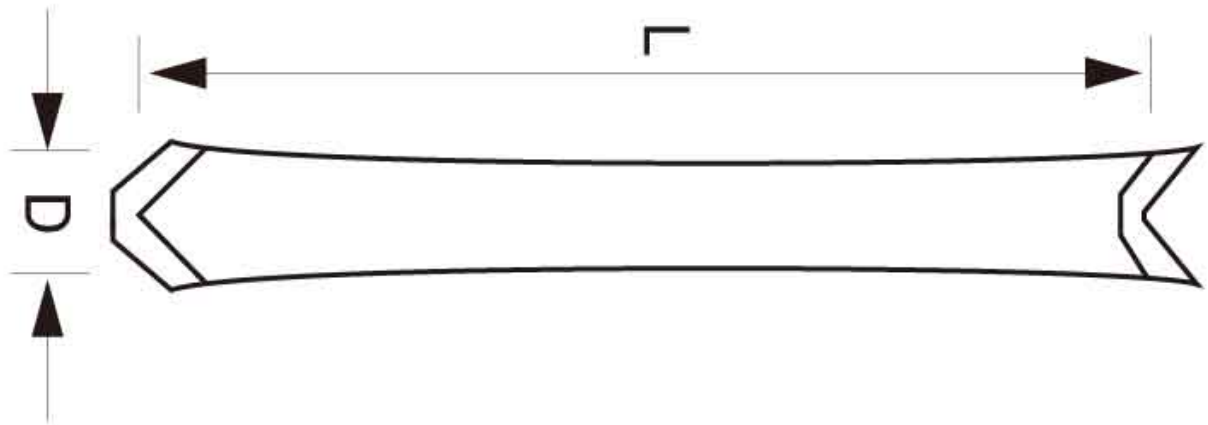

品番	カプセル径 (mm)	カプセル長 (mm)	容量 (cm <sup>3</sup> )	使用ボルト 異形棒鋼	穿孔径 (mm)	穿孔長 (mm)	最大引張荷重 (kN)	長期許容引張荷重 (kN)	短期許容引張荷重 (kN)
HP-10	10.5	120	6.4	M10、W3/8	12	90	46.0	12.0	18.0
				D10					
HP-12	12.0	130	9.6	M12、W1/2	14	100	62.1	14.9	22.4
				D13	16				
HP-16	15.0	150	18.4	M16、W5/8	18	130	115.0	25.4	38.1
				D16	20				
HP-20	18.5	210	41.4	M20	23	200	239.0	54.4	81.7
				W3/4	22				
				D19	24				
HP-22	23.0	250	77.7	M22、W7/8	27	250	290.0	72.5	108.7
				D22	28				
HP-24	26.0	300	120.0	M24、W1	30	300	330.0	93.1	139.6
				D25	32				
HP-20	32.0	310	190.0	M30	35	350	499.0	117.8	176.7
				W1-1/4	37				
				D32	40				