


図面／規格  
【六角ボルト（半）】

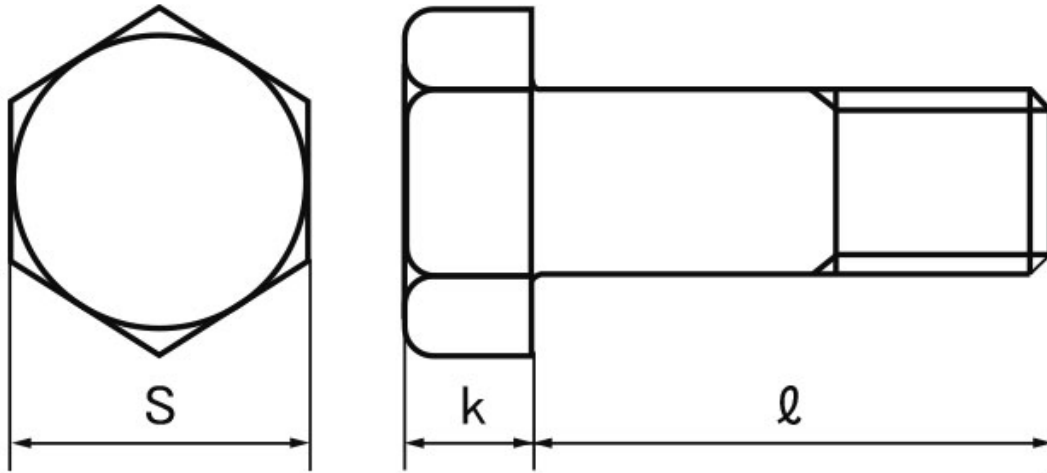

| ねじの呼び (d) | ピッチ  | S    | k    |
|-----------|------|------|------|
|           |      | 基準寸法 | 基準寸法 |
| M6        | 1.0  | 10   | 4    |
| M7        | 1.0  | 12   | 5.5  |
| M8        | 1.25 | 13   | 5.5  |
| M10       | 1.5  | 17   | 7    |
| M12       | 1.75 | 19   | 8    |
| M14       | 2.0  | 22   | 9    |
| M16       | 2.0  | 24   | 10   |
| M18       | 2.5  | 27   | 12   |
| M20       | 2.5  | 30   | 13   |
| M22       | 2.5  | 32   | 14   |
| M24       | 3.0  | 36   | 15   |
| M27       | 3.0  | 41   | 17   |
| M30       | 3.5  | 46   | 19   |
| M33       | 3.5  | 50   | 21   |
| M36       | 4.0  | 55   | 23   |
| M39       | 4.0  | 60   | 25   |
| M42       | 4.5  | 65   | 26   |
| M45       | 4.5  | 70   | 28   |
| M48       | 5.0  | 75   | 30   |
| M52       | 5.0  | 80   | 33   |
| M56       | 5.5  | 85   | 35   |
| M64       | 6.0  | 95   | 40   |