


図面／規格 【ARケミカルセッター（AP）】

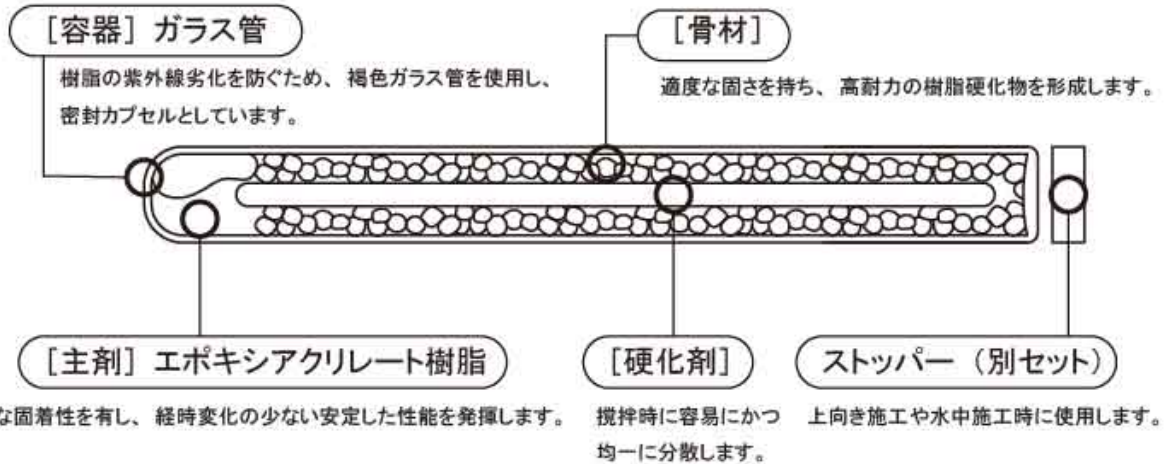

単位(mm)

品番	カプセル径	カプセル長	容量 (ml)	使用ボルト 異形棒鋼	穿孔径	穿孔長	最大引張荷重 kN(kgf)
AP-8	8.0	70	2.7	M8・W5/16	9	70	35.0 (3,570)
AP-10	10.5	90	6.3	M10・W3/8	12	90	48.6 (4,950)
				D10	13		
AP-12	13.0	95	9.5	M12・W1/2	14.5	100	62.0 (6,320)
				D13	16		
AP-16	17.0	125	21.5	M16・W5/8	19	130	100.4 (10,240)
				D16	20		
AP-20	20.0	195	50.3	M20	24	200	193.3 (19,720)
				W3/4	22		
				D19	25		
AP-22	24.0	245	90	M22・W7/8	28	250	282.0 (28,770)
				D22	30		
AP-24	28.0	280	148	M24・W1	32	300	365.3 (37,270)
				D25	34		
AP-30	35.0	330	276	M30・W1 1/4	40	350	505.3 (51,560)
				D32	42		
AP-36	40.0	400	447	M36・W1 1/2	48	400	572.7 (58,430)
				D38	50		
AP-2016	20.0	160	41	M20	24	160	128.5 (13,110)
				W3/4	22		
				D19	25		